
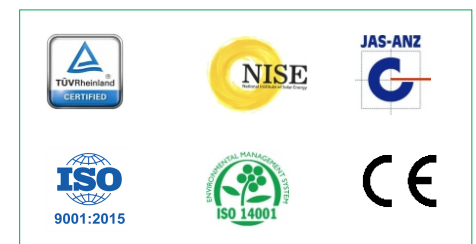


MINITHRON SERIES

4BB SERIES

Model Type	EFS12120MF72
Electrical Data: at Standard test condition (STC)*	
Maximum power (P_{max})	120 WP
Open circuit voltage (V_{oc})	22.32 V
Short circuit current (I_{sc})	7.10 A
Voltage at P_{max} (V_{mp})	18.1 V
Current at P_{max} (I_{mp})	6.63 A
Tolerance at P_{max}	±3% WP
Thermal Data:	
Temperature coefficient of V_{oc}	-0.36 %/K
Temperature coefficient of I_{sc}	0.06 %/K
Temperature coefficient of P_{max}	-0.43 %/K
Normal operating cell temperature	47±2 °C
Mechanical Data:	
Cell type	Multi Crystalline
Solar cell per module	36
Module dimensions L x W x T, mm	1250 x 665 x 35
Mounting hole pitch (Y)	600mm
Mounting hole pitch (X)	630mm
Mounting hole size (A)	12 x 8.5mm oblong holes at 4 places
Grounding Hole Size (B)	6mm dia circular @ 2 places
Module weight, Kg	9.45
Module area, m ²	0.831
Junction box	3 TERMINAL WITH 2 BYPASS DIODE
Cables & Plug	NA
Front cover	3.2 Toughened textured low iron glass
Embedding	EVA (ethylene vinyl acetate)
Permissible operating conditions:	
Operating temperature range	-40 °C TO 85 °C
Maximum system voltage	1000 VDC
Application class	A
Warranty and Certifications	
Product Warranty	10 years on materials & workmanship
Perfarnance Warranty	25 years linears power out put

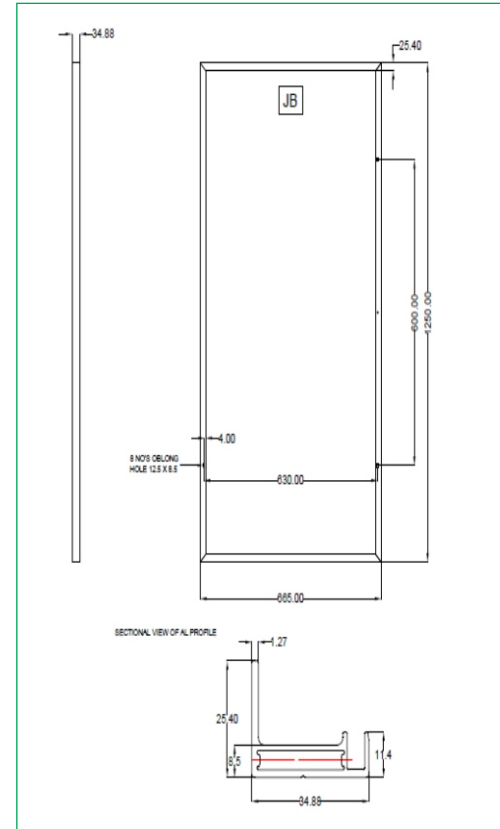

Notes:

The specifications and the key feature may deviate due to on going innovation, research and product enhancement. Enfros reserves the right to make any changes/modifications to the information described herein at any time without prior notice.
 Warranty - Please refer to "Enfros Solar Warranty" document for Terms & Conditions
 Certifications - IEC 61215 Ed. 2, IEC 61730, IEC 61701, CE

ENFROS TECHNOLOGIES PVT. LTD.

Plot No. 109, 1st Phase Harohalli Industrial Area, Kanakapura Taluk, Ramanagara District, Bangalore - 562 112. (KA, INDIA)

Mail to - info@enfros-solar.com, sales@enfros-solar.com

Phone - +91 76249 56112, +91 96862 53007

www.enfros-solar.com